




MEGATAC

Powerful Glue for Vacuum Infusion

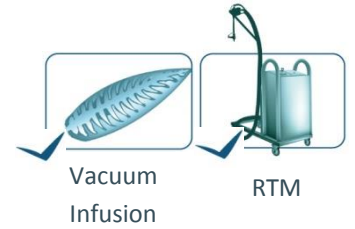

DESCRIPTION

MEGATAC glue was created for vacuum infusion manufacturing process, it ensures a perfect adhesion of reinforcements during the layup stage. The glue has a powerful adhesion strength.

MEGATAC's powerful adhesion strength allows the setup of heavy reinforcements and cores (foam, balsa...).

PROS:

- Available as a spray: WEB type spray, low volatile content.
- Powerful adhesion strength.

APPLICATION PROCESS

Shake well before spraying. Use temperature between 15°C and 40°C.

Set the nozzle on "L" (low), "M" (medium) or "H" (high) to adjust rate of flow

The sprayed surface must be clean, dry, and without grease, oil, or any contaminant. Spray a layer of glue onto the surface: hold the can 15/20cm from it. Do not over spray the surface. Let it dry for approximately 10 seconds until obtaining a slightly viscous texture. Apply the reinforcement or part to glue.

MEGATAC is compatible with most resin systems however is left to end-user's appreciation.

PROPERTIES

Expiration: 18 months

Storage: No degradation nor alteration of the glue due to freezing.

Thaw out at ambient temperature the glue before use.

Do not store nor keep directly on the ground with temperature lower than 15°C.

Flammability: Very flammable

Physical Properties: White color

Base Solvent: Hydrocarbon mix

CONFORM TO
CLP2015 REGULATION
applicable on 01/06/15



	SPRAY
VOLUME	500ml
CONTAINER	Throwaway
AMOUNT PER PALLET	1,512